Stealthbox®

INSTALLATION GUIDE
for the

SB-MIN-COOP/8W7

SKU#94426
2007+

Thank you for choosing a JL Audio Stealthbox® for your automotive sound system. With proper installation, your new vehicle-specific enclosed subwoofer system will deliver years of listening pleasure.

We strongly recommend that you have your new Stealthbox® installed by your authorized JL Audio dealer. The installation professionals employed by your dealer have the necessary tools and experience to disassemble and reassemble your vehicle properly. If you prefer to perform your own installation, please read this installation guide completely before beginning the process.

JL AUDIO®
Ahead of the Curve™

IMPORTANT

If you choose to perform the installation yourself, it is absolutely vital that the Stealthbox® be properly mounted to the vehicle according to these instructions. Failure to mount the enclosure properly presents two problems:

1) The sub-bass performance will suffer due to the movement of the enclosure caused by the force exerted by the woofer(s).

2) A loose enclosure presents a serious safety hazard in the event of a collision or sudden deceleration.

INSTALLATION DIFFICULTY:

3 OUT OF 5

ESTIMATED TIME:
2-3 HOURS

STEP 1

Remove all of the contents from the rear of the vehicle including the carpeting from rear cargo area. Place the two 3"x 3" wax squares as shown.

STEP 2

Thread the two included 3/8-16x 2 1/4" Socket Cup Set Screws (circled) into the Stealthbox® so that only approximately 3/8" remains exposed (see DETAIL below).

DETAIL

Continued on Next Page

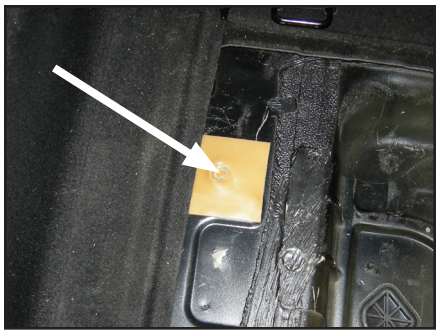

STEP 3

Place the Stealthbox® into the vehicle in the orientation that it will ultimately remain in. The speaker terminals should be on the side facing towards the front of the vehicle. Once in place, press down on the enclosure so that the two 3/8-16x 2 1/4" Socket Cup Set Screws make depressions in the 3" x 3" wax squares. If the Socket Cup Set Screws do not make the depressions in the wax squares, back them out further and repeat the procedure untill they do. Once the locations are marked, Back out the Set Screws so that approximately 1-1 1/2" is exposed.

STEP 4

CAUTION

Before drilling, **always make sure that you are not going to be drilling into any gas lines, brake lines, transmission lines, electrical wiring, exhaust systems** or anything else that might cause a reduction in your weekly pay. Always wear eye protection when drilling.
Using a 1/2" drill bit, drill where the impressions were made in the wax squares.

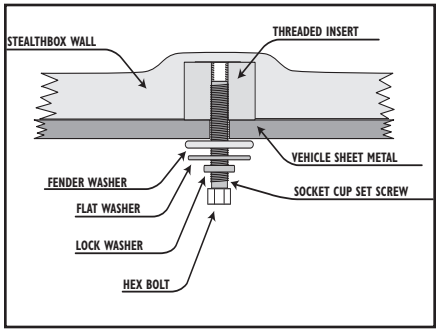

STEP 5

Set the enclosure into place with the Socket Cup Set Screw going through the holes drilled in **STEP 4**. Install the supplied hardware on the Socket Cup Set Screw to secure the Stealthbox®. There should be a Hex Head Nut, Split Lock Washer and, Flat Washer on each Socket Cup Set Screw. Only snug each set of hardware initially then, tighten each set after they are both snug.

DETAIL

CONGRATULATIONS!

You have completed the installation for this model!

Enjoy your new Stealthbox®!

Please refer to the Power Recommendation section for an amplifier recommendation and basic set-up help.

INCLUDED HARDWARE

2) 3/8" Flat Washer
2) 3/8-16x 2 1/4" Socket cup Set Screw
2) 3/8" Split Lock Washer
2) 3/8" Hex Nut

SPECIFICATIONS

Enclosure Type: Acoustic Suspension (sealed)
Driver Type: 8W7 (2)
Nominal Impedance: 3 Ohm (each)
Continuous Power Handling: 500 Watts (each)

POWER RECOMMENDATION

JL Audio recommends using a high quality amplifier such as the JL Audio HD750/1.
The diagram below shows the recommended crossover, infrasonic filter and equalizer settings for the HD750/1 when being used to power your Stealthbox®.

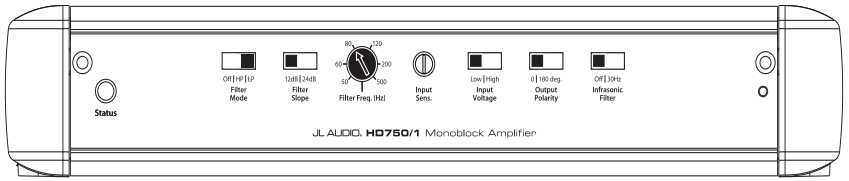

The JL Audio HD750/1 is a very versatile audio component. Please consult the owner's manual for even more detailed information about installing and tuning this amplifier.

MID/HIGH FREQUENCY DRIVER FITMENT

A variety of JL Audio coaxial and component systems will fit in the factory speaker locations of your vehicle.

Front Speaker Size / Location: 6 1/2"- Front Doors
Fits JL Audio Models: TR650-CSi, TR650-CXi, VR650-CSi, VR650-CXi, XR650-CSi, XR650-CXi, C5-650, C5-650x & ZR650-CSi

Rear Speaker Size / Location: 6inch x 9inch - Rear sides
Fits JL Audio Models: *TR690-TXi & *VR690-CXi

*Smaller speakers would also fit using custom adaptors

JL AUDIO®
Ahead of the Curve™

(954) 443-1100 www.jlaudio.com

All specifications are subject to change without notice. "JL Audio®" and the JL Audio logo, "Stealthbox" and the Stealthbox logo are registered trademarks of JL Audio, Inc. "Ahead of the Curve" and its respective logo is a trademark of JL Audio, Inc.
JLA-SKU# 011280 ©11-13-2008 • Printed in USA • ©2008 JL Audio, Inc. • U.S. PATENTS: #5,734,734 #5,949,898 #6,118,884 #6,229,902 #6,243,479 #6,294,959 #6,501,844 #6,496,590 #6,441,685 #5,687,247 #6,219,431 #6,625,292 #D472,891 #D480,709 Other U.S. & Foreign patents pending. For more detailed information please visit us online at **www.jlaudio.com.**

10369 NORTH COMMERCE PARKWAY • MIRAMAR, FLORIDA • 33025 • USA